

Ambience Audio Services

Acoustic Measurement and Analysis

15 Tamarind Close
Richmond Hill NSW 2480
ambienceaudio.com.au

Mobile: 0429 405 070

Results of Noise Monitoring

**Blakebrook Quarry
550 Nimbin Road
Blakebrook NSW 2480**

Prepared for

**Ecoteam
13 Ewing Street
Lismore NSW 2480**

Document Control				
Rev. No	Date	Prepared By		Notes
Prepared	24/02/2025	[REDACTED]	[REDACTED]	
Final	27/02/2025	[REDACTED]	[REDACTED]	

Copyright © 2025 by Ambience Audio Services. No part of this document may be used for any purpose other than the original assessment or by a Third Party without permission in writing from the author.

Table of Contents

1	INTRODUCTION.....	3
2	NOISE MONITORING REQUIREMENTS.....	4
3	MEASUREMENT PROCEDURE AND RESULTS.....	9
3.1	Instrumentation	9
3.2	Measurement Procedure.....	9
3.3	Weather Conditions	10
3.4	Measurement Results	12
3.5	Low Frequency Analysis	13
4	DISCUSSION OF RESULTS	14
5	SUMMARY AND CONCLUSION.....	16
APPENDIX A	17
	Definitions of Terms	17
APPENDIX B	20
	Comparison of Sound Pressure Levels.....	20
APPENDIX C	21
	Quarry and Asphalt Plant Operations 5 th & 6 th Feb 2025	21
APPENDIX D	22
	L _{AFmax} Logged Noise Level Graphs 5 th & 6 th Feb 2025.....	22

1 INTRODUCTION

Ambience Audio Services have been engaged by Ecoteam to conduct noise monitoring at Blakebrook Quarry, 550 Nimbin Road, Blakebrook NSW.

The current Noise and Blast Management Plan (NBMP) for Blakebrook Quarry (Lismore City Council Oct 2022) includes an Out of Hours Work Protocol (OHWP) for the asphalt plant, which is anticipated to occur 5 nights per month on scheduled projects. Section 7 of the NBMP details the noise monitoring program. Section 7.3 requires noise monitoring to be conducted once every 6 months to represent winter and summer conditions. The noise monitoring and reporting is to be conducted for each assessment time period; Day - 7am to 6pm, Evening – 6pm to 10pm, Night – 10pm to 7am).

Noise monitoring was conducted on the morning of 5th Feb 2025 and evening and night of 6th of Feb 2025, with the quarry and asphalt plant operating under normal load conditions and suitable weather conditions.

Quarry operations while noise monitoring was conducted for the day time period included: crushing, screening and stockpiling on the northern end of the quarry floor, crushing and screening in the central section, and trucks and loaders on the quarry floor and internal haul roads. Quarry operation locations on the quarry floor during noise monitoring at residential receivers is provided in Appendix C.

The asphalt plant was operating under normal load conditions with a front end loader and haul trucks on the internal haul roads during the evening and night time noise monitoring periods.

To assist with the interpretation of some of the terminology used in this report, Appendix A provides definitions of acoustic terms. Appendix B is a chart of everyday sound pressure levels.

Appendix D are the logged noise levels for the asphalt plant, and at each receiver location.

2 NOISE MONITORING REQUIREMENTS

The noise monitoring requirements for the Blakebrook Quarry are outlined in Section 2.2, Sections 7.1, 7.2, 7.3, 7.4, 7.5 and 7.7 of the NBMP (LCC Oct 2022).

Extracts of the relevant parts are copied below.

Section 2.2

3. *The Proponent must ensure that the noise generated by the project does not exceed the criteria in Table 2 at any residence on privately owned land.*

Table 2: Noise Criteria dB(A)

Receiver	Day L _{Aeq} (15 minute)
Location 2 and 7	36
All other locations	35

Out of Hours Work Protocol – Asphalt Operations

The OHWP has provided management strategies for potential noise sources involving asphalt operations and truck movements. The evening and night project-specific noise level criterion is 35 dB(A) L_{Aeq} (15 minute).

L4.1 Noise from the licenced premises must not exceed an L_{Aeq} (15 minute) noise emission criteria of 36 dB(A) at Location 2 and 7, and 35 dB(A) at all other sensitive receivers, except as expressly provided by in this licence.

7.2 MONITORING LOCATIONS

The original Noise Assessment (ERM 2009) and updated NIA (Mitchel Hanlon, SEE 2019) included six (6) noise monitoring locations that were used throughout the assessment, based on proximity to nearby potentially sensitive receptors. Given the proximity between monitoring locations and the location of anticipated noise-generating plant and equipment, the monitoring locations have been revised and separated into primary and supplementary acoustic monitoring locations for the purposes of the NBMP.

Primary and supplementary acoustic locations are identified in *Figure 2*. Primary acoustic monitoring locations consist of locations 2, 4 and 8 with the remainder of locations being supplementary acoustic monitoring locations.

An agreement was reached with the landowner located along Nimbin Road (previously identified as location 8, ERM 2009) in April 2016, wherein the landowner has agreed to the exceedances in noise levels from Quarry operations. As such the location has been removed as a primary acoustic monitoring location, and a new monitoring location selected being (current) location 8.

Primary monitoring locations will be utilised during noise compliance monitoring and are considered representative in determining compliance with the relevant Conditions of Approval.

In the event that additional monitoring is required then additional monitoring may be undertaken at the most practical supplementary acoustic monitoring locations, as well as at the primary acoustic monitoring locations.

7.4 METHODOLOGY

Noise

Operator attended noise measurements shall be conducted at all primary acoustic measurement locations (Locations 2, 4 and 8 – refer *Figure 2*) to quantify and characterise the maximum (L_{Amax}), the energy equivalent (L_{Aeq}), and the background (L_{A90}) noise levels from ambient noise sources and quarrying operations over a 15 minute measurement period.

The operator shall quantify noise emissions and estimate the L_{Aeq} (Period) noise contribution during Quarry activities, as well as the overall level of ambient noise. During attended monitoring, digital recordings will be conducted to allow for additional post analysis of the Quarry noise levels and source identification.

All acoustic instrumentation employed throughout the monitoring program shall meet with the requirements of AS/NZS IEC 61672.1 Sound level meters Specifications & AS/NZS IEC 61672.2 Sound level meters Pattern Evaluation.

Instrument calibration shall be checked before and after each measurement survey, with the variation in calibrated levels not exceeding ± 0.5 dBa.

7.5 METEOROLOGICAL PARAMETERS

Adverse meteorological conditions have the potential to increase noise levels, for example wind speeds up to 3 m/s or temperature inversions, however wind speeds above 5 m/s (and rainfall) have the potential to generate extraneous and erroneous noise events, which reduce the accuracy and confidence in measured data.

As such, meteorological parameters will be evaluated prior to undertaking works on site, to gain an understanding of the weather conditions and the potential for variations in noise levels.

All noise measurements shall be accompanied by both qualitative description (including cloud cover, approximate wind direction and speed) and quantitative measurements of prevailing local weather conditions throughout the survey period. Rainfall data and meteorological parameters will be collected from the weather station located on-site, as shown in *Table H*.

Table H: Meteorological Measurement Parameters

Measured Parameter	Unit	Sample Interval
Mean Wind Speed	m/s	15 minutes
Mean Wind Direction	Degrees	15 minutes
Aggregate Rainfall	mm	15 minutes
Mean Air Temperature	C°	15 minutes

Accounting For Annoying Noise Characteristics (Low Frequency Noise)

The *Noise Policy for Industry* (NPfI 2017) states that a noise source may exhibit a range of particular characteristics that increase annoyance, such as tones, impulses, low frequency noise and intermittent noise.

Where this is the case, an adjustment ('modifying factor corrections') is applied to the source noise level received at an assessment point before it is compared with criteria to account for the additional annoyance caused by the particular characteristic.

Application of these modifying factors is described in *Fact Sheet C: Corrections for annoying noise characteristics* and outlines correction factors to be applied to the source noise level at the receiver before comparison with the project noise trigger levels to account for the additional annoyance caused by those modifying factors.

The modifying factor corrections should be applied having regard to:

- the contribution noise level from the premises when assessed/measured at a receiver location, and
- the nature of the noise source and its characteristics (as set out in this fact sheet).

The NPfI provides the following definitions to support the modifying factor corrections:

- Tonal Noise – Containing a prominent frequency and characterised by a definite pitch.
- Low Frequency Noise – Containing major components within the low frequency range (20 Hz to 250 Hz) of the frequency spectrum.
- Impulsive Noise – Having a high peak of short duration or a sequence of such peaks.
- Intermittent Noise – The level suddenly drops to that of the background noise several times during the assessment period, with a noticeable change in noise level of at least 5 dB.

The modifying factor corrections (and how they are applied) are present in *Table C1* of the NPfI and vary depending on the noise characteristic being assessed. All noise levels generated by the Quarry, which may generate tonal or low frequency content, will be assessed as part of the NBMP monitoring with due regard to these modifying factor penalties, and in accordance with the requirements presented in the NPfI.

Impulsive and intermittent noise, as defined by the NPfI, are not typical characteristics of the Quarry, hence tonal and low frequency noise (LFN) are most relevant to the Quarry and those modifying corrections are reproduced in *Table 1*.

Tonal Noise	One-third octave band analysis using the objective method for assessing the audibility of tones in noise – simplified method (ISO1996.2:2007 – Annex D)	Level of one-third octave band exceeds the level of the adjacent bands on both sides by: <ul style="list-style-type: none"> • 5 dB or more if the centre frequency of the band containing the tone is in the range 500–10,000 Hz • 8 dB or more if the centre frequency of the band containing the tone is in the range 160–400 Hz • 15 dB or more if the centre frequency of the band containing the tone is in the range 25–125 Hz. 	5 dB ^{2,3}	Third octave measurements should be undertaken using unweighted or Z-weighted measurements. Note: Narrow-band analysis using the reference method in ISO1996-2:2007, Annex C may be required by the consent/regulatory authority where it appears that a tone is not being adequately identified, e.g. where it appears that the tonal energy is at or close to the third octave band limits of contiguous bands.
Low Frequency Noise	Measurement of source contribution C-weighted and A-weighted level and one-third octave measurements in the range 10–160 Hz	Measure/assess source contribution C- and A-weighted Leq,T levels over same time period. Correction to be applied where the C minus A level is 15 dB or more and: <ul style="list-style-type: none"> • where any of the one-third octave noise levels in Table C2 are exceeded by up to and including 5 dB and cannot be mitigated, a 2-dB(A) positive adjustment to measured/predicted A-weighted levels applies for the evening/night period • where any of the one-third octave noise levels in Table C2 are exceeded by more than 5 dB and cannot be mitigated, a 5-dB(A) positive adjustment to measured/predicted A-weighted levels applies for the evening/night period and a 2-dB(A) positive adjustment applies for the daytime period. 	2 or 5 dB ²	A difference of 15 dB or more between C- and A-weighted measurements identifies the potential for an unbalance spectrum and potential increased annoyance. The values in Table C2 are derived from Moorhouse (2011) for DEFRA fluctuating low-frequency noise criteria with corrections to reflect external assessment locations.

Notes:


1. Corrections to be added to the measured or predicted levels, except in the case of duration where the adjustment is to be made to the criterion.
2. Where a source emits tonal and low-frequency noise, only one 5-dB correction should be applied if the tone is in the low-frequency range, that is, at or below 160 Hz.
3. Where narrow-band analysis using the reference method is required, as outlined in column 5, the correction will be determined by the ISO1996-2:2007 standard.

Noise monitoring at the receiver locations were conducted within 30m of the residential dwelling in the direction of the quarry.

Table 2.1 Primary Receiver Locations	
Receiver	Street Address
2	█ Keerrong Rd Blakebrook
4	█ Booerie Creek Road Booerie Creek
8	█ Nimbin Rd Blakebrook

Figure 2.1 Noise Monitoring Locations

Figure 2: Noise & Blast Monitoring Locations Map

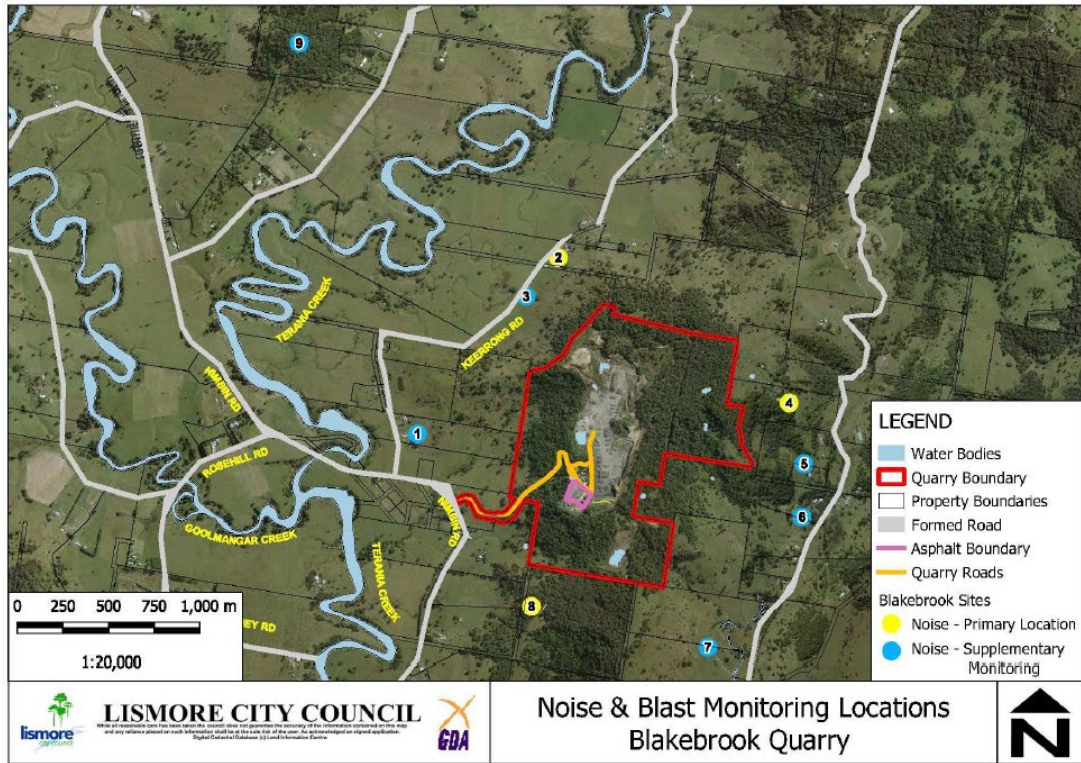

3 MEASUREMENT PROCEDURE AND RESULTS

3.1 Instrumentation

Table 3.1 Instrumentation		
Instrument	Serial #	Calibration Date
Brüel & Kjaer 2250 G4 Sound Level Meter	3028735	Jan 2024
Brüel & Kjaer 2250 G4 Sound Level Meter	3006868	Oct 2023
Brüel & Kjaer 2250 G4 Sound Level Meter	3004548	Jan 2024
Brüel & Kjaer 2250 G4 Sound Level Meter	3031300	Oct 2024
Brüel & Kjaer 4231 Calibrator	3029274	Oct 2024

The sound level meters (SLM) used during the noise survey conform to Australian Standard 1259 "Acoustics - Sound Level Meters" (1990), as type 1 precision sound level meters, and have an accuracy suitable for both field and laboratory use. The meters' calibrations were checked before and after the measurement periods with a Bruel & Kjaer acoustic calibrator. No significant system drift occurred over the measurement periods.

The SLMs and calibrator have been checked, adjusted and aligned to conform to the factory specifications and issued with conformance certificates by a certified NATA facility.

3.2 Measurement Procedure

Measurements were made in general accordance with procedures in:

1. Australian Standard AS 1055 : 2018 *Acoustics - Description and measurement of environmental noise*
2. The NSW Government *Noise Policy for Industry* (EPA Oct 2017)

The microphone of a B&K 2250 G4 SLM was mounted at a height of 1.2m above the ground and a Bruel and Kjær outdoor windscreen fitted to the microphone. The SLM was located on the quarry floor approximately 80 – 100m from the crushing and screening operations, to monitor noise levels while measurements were being conducted at the receiver locations.

The microphone of a second B&K 2250 G4 SLM was mounted on a 1.5m high tripod, a Bruel and Kjær outdoor windscreen fitted to the microphone, and located near the asphalt plant to monitor noise levels of the asphalt plant while measurements were being conducted at the receiver locations.

Both SLMs were set to record continuously for the duration of receiver monitoring with 1 second samples. A sound recording was conducted simultaneously.

Two other B&K 2250 G4 SLMs were utilised to monitor and record noise levels at receiver locations while the quarry and asphalt plant were operating. The microphones were mounted on 1.2m – 1.5m high tripods and Bruel and Kjaer outdoor windscreens fitted to the microphones.

A 15 minute period was recorded at each receiver location with A and C weighting, fast response, and 1 second samples with a simultaneous sound recording. Spectrum data was recorded with a linear (Z) weighting.

The clocks on the SLMs were synchronised to enable comparison of noise levels at the quarry and asphalt plant reference locations, with noise levels at the receiver locations.

3.3 Weather Conditions

Weather conditions were generally good for acoustic measurements. Observations were taken at each receiver location with a Kestrel 3000 pocket weather meter.

Table 3.2 Receiver Locations Weather Summary 5 th & 6 th Feb 2025						
Receiver	Time	Temp	Relative Humidity	Wind	Wind Dir	Cloud Cover
		°C	%	Speed		
				(m/s)		
2	9:08 AM	25	65	Calm		0/8
	8:30 PM	24	86	Calm		4/8
	10:39 PM	23	89	Calm		0/8
4	10:20 AM	24.5	87	0.5	N	4/8
	8:58 PM	24	80	Calm		0/8
	10:55 PM	23	81	Calm		0/8
8	10:18 AM	24	72	Calm		0/8
	9:14 PM	25	76	Calm		0/8
	10:00 PM	23	83	Calm		0/8

Weather data from the weather station at Blakebrook Quarry is presented in Table 3.3 below.

Table 3.3 Blakebrook Quarry Weather Station Observations 5th & 6th Feb 2025						
Date	Time	AVERAGE Air Temperature 10m Deg C	AVERAGE Wind Speed 10m km/h	AVERAGE Wind Speed 10m m/s	AVGDIR Wind Direction 10m Deg	TOTAL Rain Gauge - mm
5/2/2025	8:10:00 AM	21.4	0	0.0	289	0.0
	8:20:00 AM	21.5	0.2	0.1	296	0.0
	8:30:00 AM	21.6	2.4	0.7	302	0.0
	8:40:00 AM	22	2.5	0.7	306	0.0
	8:50:00 AM	22.1	3	0.8	312	0.0
	9:00:00 AM	22.5	3.7	1.0	299	0.0
	9:10:00 AM	22.7	3.3	0.9	309	0.0
	9:20:00 AM	23.1	1.9	0.5	258	0.0
	9:30:00 AM	23.6	2.4	0.7	284	0.0
	9:40:00 AM	23.7	1.5	0.4	265	0.0
	9:50:00 AM	24.1	1.7	0.5	236	0.0
	10:00:00 AM	24.7	1.9	0.5	234	0.0
	10:10:00 AM	25	2.8	0.8	271	0.0
	10:20:00 AM	25.1	2.1	0.6	234	0.0
	10:30:00 AM	25.2	1.7	0.5	223	0.0
	10:40:00 AM	25.6	0.6	0.2	242	0.0
	10:50:00 AM	25.7	1.2	0.3	253	0.0
	11:00:00 AM	25.7	2.3	0.6	255	0.0
	11:10:00 AM	25.9	1.3	0.4	240	0.0
	11:20:00 AM	26.3	1.1	0.3	223	0.0
11:30:00 AM	26.3	0.5	0.1	255	0.0	
11:40:00 AM	26.8	1.6	0.4	224	0.0	
11:50:00 AM	27	1.7	0.5	230	0.0	
12:00:00 PM	27	1.1	0.3	230	0.0	
6/2/2025	8:10:00 PM	24.1	2.3	0.6	75	0.0
	8:20:00 PM	23.7	1.4	0.4	97	0.0
	8:30:00 PM	23.6	1.6	0.4	66	0.0
	8:40:00 PM	23.5	1.5	0.4	100	0.0
	8:50:00 PM	23.4	1.5	0.4	143	0.0
	9:00:00 PM	23.2	2.5	0.7	116	0.0
	9:10:00 PM	23.1	0.9	0.3	90	0.0
	9:20:00 PM	23	1.1	0.3	100	0.0
	9:30:00 PM	23.1	1.3	0.4	70	0.0
	9:40:00 PM	23	0.8	0.2	9	0.0
	9:50:00 PM	22.9	1.6	0.4	78	0.0
	10:00:00 PM	23	1.4	0.4	63	0.0
	10:10:00 PM	22.9	0.9	0.3	15	0.0
	10:20:00 PM	22.8	1.4	0.4	95	0.0
	10:30:00 PM	22.7	2	0.6	124	0.0
	10:40:00 PM	22.6	1.1	0.3	145	0.0
10:50:00 PM	22.5	1.9	0.5	148	0.0	
11:00:00 PM	22.5	2.4	0.7	141	0.0	

Wind Direction 0 and 360 degrees – North, 90 degrees – East,
180 degrees South, 270 degrees – West

3.4 Measurement Results

Table 3.4 Blakebrook Quarry Receiver Locations Measurement Summary - 5 th & 6 th Feb 2025 (All measurements 15 mins)									
Receiver	Time Period	Start Time	Elapsed Time h:mm:ss	L _{AFmax} [dB]	L _{Aeq} [dB]	L _{Ceq} [dB]	L _{Ceq-LAeq} [dB]	L _{AF10} [dB]	L _{AF90} [dB]
2	Day	9:08 AM	0:15:00	67.7	45.9	55.0	9.1	44.7	38.0
	Evening	8:30 PM	0:15:00	76.39	50.7	53.4	2.7	49.6	46.1
	Night	10:39 PM	0:15:00	48.75	44.8	44.5	-0.3	46.1	43.5
4	Day	10:22 AM	0:15:00	70.75	55.9	56.3	0.4	58.8	48.8
	Evening	9:19 PM	0:15:00	54.34	38.9	50.6	11.7	41.9	34.0
	Night	10:02 PM	0:15:00	58.79	40.4	41.4	1.0	42.9	33.9
8	Day	10:20 AM	0:15:00	64.23	56.1	55.7	-0.4	61.0	40.7
	Evening	9:14 PM	0:15:00	60.69	47.0	56.5	9.5	50.9	40.0
	Night	10:00 PM	0:15:00	55.69	45.1	49.6	4.5	45.0	38.5

Note:

The above results are the total ambient noise levels and includes noise from the rural surroundings and asphalt plant and haul road noise if audible.

Post processing was conducted in Bruel & Kjaer BZ 5505 sound processing software to exclude other noise sources for the receiver location measurements. The exclude function was enabled for the traffic, animal and other markers. The total – exclude data enables a more accurate assessment of the noise source under investigation, by eliminating the periods that other random noise sources occur during monitoring. The results for the 3 receiver locations are presented below.

Table 3.5 Receiver 2 Measurement Summary Total - Exclude 5 th & 6 th Feb 2025 (All measurements 15 mins)									
Receiver	Period	Start Time	Elapsed Time	L _{AFmax} [dB]	L _{Aeq} [dB]	L _{Ceq} [dB]	L _{Ceq-LAeq} [dB]	L _{AF10} [dB]	L _{AF90} [dB]
R2	Day	9:08:12 AM	0:07:47	52.4	40.4	52.0	11.6	42.1	37.5
R2	Evening	8:30:00 PM	0:08:28	50.7	48.5	47.3	-1.2	49.4	46.7
R2	Night	10:39:00 PM	0:14:53	48.0	44.7	44.5	-0.3	46.1	43.5

Table 3.6 Receiver 4 Measurement Summary Total - Exclude 5 th & 6 th Feb 2025 (All measurements 15 mins)									
Receiver	Period	Start Time	Elapsed Time	L _{AFmax} [dB]	L _{Aeq} [dB]	L _{Ceq} [dB]	L _{Ceq-LAeq} [dB]	L _{AF10} [dB]	L _{AF90} [dB]
R4	Day	10:22:45 AM	0:14:39	62.5	54.9	55.7	0.9	58.6	48.7
R4	Evening	9:19:00 PM	0:10:28	47.8	38.3	41.0	2.7	43.5	33.8
R4	Night	10:02:00 PM	0:13:20	45.4	37.9	40.2	2.3	43.1	33.8

Table 3.7 Receiver 8 Measurement Summary Total - Exclude 5 th & 6 th Feb 2025 (All measurements 15 mins)									
Receiver	Period	Start Time	Elapsed Time	L _{AFmax} [dB]	L _{Aeq} [dB]	L _{Ceq} [dB]	L _{Ceq-LAeq} [dB]	L _{AF10} [dB]	L _{AF90} [dB]
R8	Day	10:20:00 AM	0:12:03	64.2	56.4	55.9	-0.5	61.2	40.5
R8	Evening	9:14:00 PM	0:11:53	53.1	45.9	50.6	4.7	50.8	39.8
R8	Night	10:01:06 PM	0:13:26	51.5	41.7	49.0	7.3	43.7	36.2

Table 3.8 Noise Observations at Receiver Locations 5 th & 6 th Feb 2025 (All measurements 15 mins)			
Receiver	Start Time	Observed Noise Sources	Quarry / Asphalt Plant Noise
2	9:08 AM	Occasional vehicle on Keerrong Rd Dog barking Distant overhead aircraft Insects consistent 2-5kHz Insects elevated A weighted background noise levels Birds	LF from quarry barely audible
	8:30 PM	Insects consistent 4kHz, 8kHz - 20kHz Occasional distant overhead aircraft Occasional distant traffic Distant dogs barking	Asphalt plant inaudible
	10:39 PM	Insects 4 kHz, 8 kHz, 20kHz Distant dog barking Distant cattle Distant overhead aircraft	Asphalt plant inaudible
4	10:22 AM	Insects 4 kHz, 8 kHz Occasional birds nearby Distant dog barking	Quarry and Asphalt plant just audible at times
	9:19 PM	Insects 4 kHz, 8 kHz Frogs Distant dog barking Helicopter circling	Asphalt plant not audible
	10:02 PM	Insects 4 kHz, 8 kHz, 16 kHz Frogs Distant dog barking Distant vehicles on Nimbin Rd	Asphalt plant inaudible
8	10:20 AM	Quarry and asphalt plant operational Birds Insects dominant 3.15 - 8kHz Heavy vehicle engine braking on Nimbin Rd Distant traffic Nimbin Rd	LF from quarry/asphalt plant just audible at times.
	9:14 PM	Insects 8kHz - 20kHz Traffic on Nimbin Rd Occasional LF from loader	LF from asphalt plant audible 31.5+ 40 Hz
	10:00 PM	Insects 4 kHz, 12.5 kHz	LF from asphalt plant audible 31.5+ 40 Hz Occasional banging of bucket audible

3.5 Low Frequency Analysis

The difference between the A and C L_{eq} levels at all Receivers was less than 15 decibels during all measurements. Therefore, no low frequency analysis is required.

4 DISCUSSION OF RESULTS

The noise logger near the work sites on the quarry floor indicated that there was consistent noise from the quarry during the measurement periods at receiver locations (graph D1)

The noise logger near the asphalt plant indicated that there was consistent asphalt plant noise after 10:00 am, which was during the day-time measurement periods at receiver locations (graph D2), and during the evening and night-time measurement periods (graph D3).

General

Insect noise significantly affected overall sound levels during this monitoring period, occurring mostly between 2 kHz and 20 kHz. Despite raising the A and C weighted L_{eq} levels, the critical low-frequency components remained below the threshold. This was also the listening impression while conducting the measurements.

Receiver 2

Receiver 2 day-time background noise levels were high, 40.4 dB $L_{A90,15min}$ after extraneous noises were excluded. This was due to insect noise in the 2 – 5 kHz frequency bands. The quarry activity was only just audible at low frequency.

Evening and night-time background noise levels were also high 48.5 dB $L_{A90,15min}$ and 44.7 dB $L_{A90,15min}$ respectively. This was due to significant insect noise at frequency bands between 4 kHz and 20 kHz. During these periods, the asphalt plant was operating and was not audible at any time.

Receiver 4

Receiver 4 day-time background noise levels were also high, 54.9 dB $L_{A90,15min}$, with significant insect noise in the 4 – 8 kHz frequency bands driving sound levels up. The quarry and/or asphalt plant noise was just audible at times.

Evening and night-time background noise levels were lower than the day-time at 38.3 dB $L_{A90,15min}$ and 37.9 dB $L_{A90,15min}$ respectively. High frequency insect noise was dominant, but the asphalt plant was inaudible.

Receiver 8

Receiver 8 day-time background noise levels were the highest of this monitoring period at 56.4 dB $L_{A90,15min}$. Again, insect noise was the primary factor in the frequency bands of 2 – 8 kHz. Low frequency from the quarry and asphalt plant activity was just audible at times.

Evening and night-time background noise levels were lower at 45.9 dB LA90,15min and 41.7 dB LA90,15min respectively. Again, significant insect noise between 4 kHz and 20 kHz was dominant. During both periods, the asphalt plant was just audible at very low frequencies, between the 31.5 Hz and 40 Hz frequency bands.

5 SUMMARY AND CONCLUSION

A noise monitoring survey was conducted to assess compliance of the day, evening, and night-time noise of the quarry and asphalt plant operational noise levels at Blakebrook Quarry, Blakebrook, via Lismore NSW. Measurements were undertaken with calibrated noise monitoring equipment on the 5th and 6th of February 2025 and conducted in general accordance with procedures in Australian Standard AS 1055:2018 and the NSW Noise Policy for Industry.

The Blakebrook Quarry operates under the New South Wales Government Environment Protection Authority, Environmental Protection Licence, EPL No. 3384. Noise emissions from quarry and asphalt plant operations at nearby residential receivers, is managed by the Noise and Blast Management Plan (NBMP) for Blakebrook Quarry (Lismore City Council Oct 2022) and includes an Out of Hours Work Protocol (OHWP) for the asphalt plant, which is anticipated to occur 5 nights per month on scheduled projects.

Day time (7am – 6pm) noise limits at residential receivers without a written agreement with the quarry are 36 dB(A) $L_{Aeq,15min}$ for receivers 2 and 7, and 35 dB(A) $L_{Aeq,15min}$ for all other receivers. The evening (6pm – 10pm) and night time (10pm – 7am) noise limit is 35dB(A) $L_{Aeq,15min}$ at all receiver locations without a written agreement with the quarry.

Measurements were conducted at the 3 primary receiver locations (Receivers 2, 4, 8) while the quarry and asphalt plant were operating under normal load conditions.

Insect noise was a significant factor in all monitoring conducted in this round, which is reflected in the very high background noise levels reported.

The quarry and asphalt plant operations were either not audible or just audible at times at all monitoring locations. However, there were no exceedances of the criteria threshold at any time.



Acoustic Consultant
Ambience Audio Services

APPENDIX A Definitions of Terms

Sound pressure level (L_p): A measurable quantity of the size or amplitude of the pressure fluctuations (sound waves) above and below normal atmospheric pressure compared to a reference pressure. Sound pressure levels are measured in decibels whereas sound pressure is measured in pascals (N/m^2).

Decibels (dB): a ratio of energy flows. When used for sound measurement, it is the ratio between a measured quantity of sound pressure and an agreed reference sound pressure. The dB scale is logarithmic and uses the threshold of hearing of 20 μPa (micro pascals) as the reference pressure. This reference level is defined as 0 dB.

Frequency (Hz): The number of pressure variations per second (cycles per second) is called the **frequency** of sound and is measured in **Hertz (Hz)**. The rumble of distant thunder has a low frequency, while a whistle has a high frequency. The normal range of hearing for a healthy young person extends from approximately 20Hz up to 20 000 Hz (20 kHz) while the range from the lowest to highest note on a piano is approximately 27.5 Hz to 4.2 kHz.


Spectral characteristics: The frequency content of noise.

Octave: a logarithmic unit for ratios between frequencies, with one octave corresponding to a doubling of frequency. For example, the frequency one octave above 40 Hz is 80 Hz.

1/3 Octave: a logarithmic unit of frequency ratio equal to one third of an octave.

“A” frequency weighting: The method of frequency weighting the electrical signal within a noise-measuring instrument to give a very approximate simulate to the human perception of loudness. The symbols for the noise parameters often include the letter “A” (e.g., L_{Aeq} , dBA) to indicate that frequency weighting has been included in the measurement. “A” weighting is most commonly used with regard to noise control issues, regulations and environmental standards.

“C” frequency weighting: The filters used in C weighting captures lower frequencies than A weighting as indicated in the chart below.

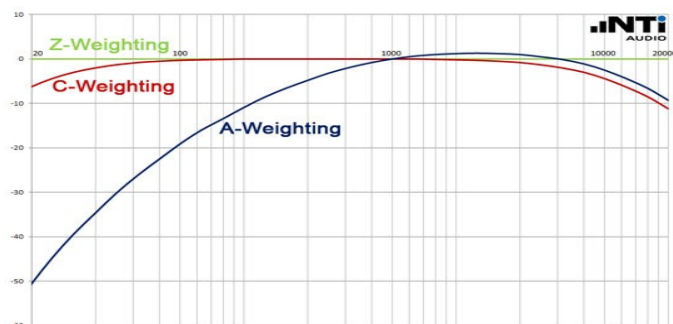


The A-weighting curve is used extensively for general purpose noise measurements but the C-weighting correlates better with the human response to high noise levels.

Fast, Slow and Impulse time weightings: Standardised root-mean-square (rms) averaging times to help define fluctuating noise levels. Impulsive noises have high peak levels with a very short duration (e.g., gun shot), or a sequence of such peaks. The 'Slow' time weighting averages the fluctuations over a one second time base whilst the 'Fast' time weighting averages the fluctuations over a one-eighth of a second time base. Environmental assessment standards usually specify the time weighting (**F**, **S**, or **I**) to be used.

L_{Aeq}: The A-weighted equivalent continuous noise level. A widely used noise descriptor which provides an average of the energy of a constant level of noise which is the same as the varying noise signal being measured. The time in which the measurement was sampled, is indicated with a subscripted number e.g. L_{Aeq,15 minute} is a 15-minute sample.

Percentile Levels L_N: The sound pressure level that is exceeded for N per cent of the time over which a given sound is measured. e.g. **L_{A90}** is the A-weighted sound pressure level that is exceeded for 90% of the time over which a given sound is measured.

L_{A90} is commonly used to describe the **background noise level** for community noise assessments.

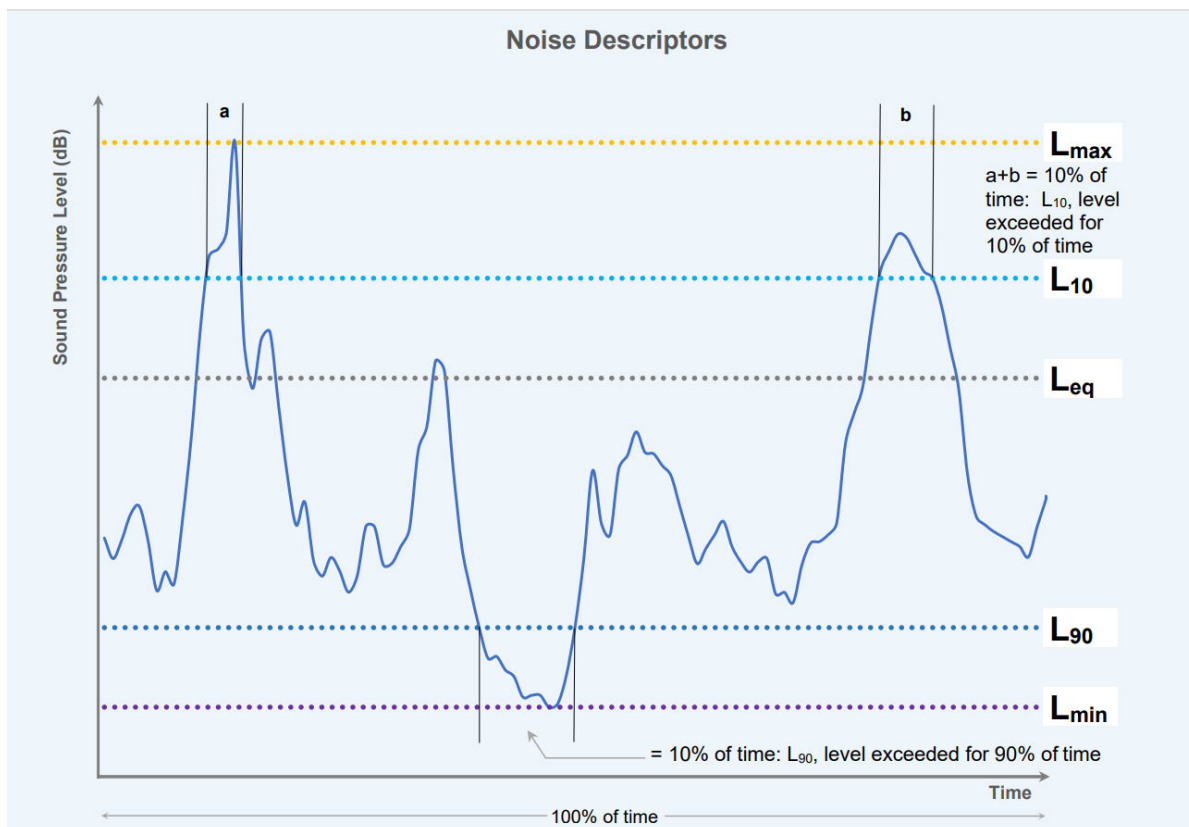

Ambient noise: The all-encompassing noise associated within a given environment. It is the composite of sounds from many sources, both near and far.

Extraneous noise: Noise resulting from activities that are not typical of the area. Atypical activities may include construction, and traffic generated by holiday periods and by events such as concerts or sporting events. Normal daily traffic is not to be considered extraneous.

Background noise: The underlying level of noise present in the ambient noise, excluding the noise source under investigation, when extraneous noise is removed. This is described using the **LA90** descriptor, fast time weighting.

Intrusive Noise: Refers to noise that intrudes above the background level by more than 5 decibels.

Noise limits: Enforceable noise levels that appear in consents and licences. The noise limits are based on achievable noise levels, which the proponent has predicted can be met during the environmental assessment. Exceedance of the noise limits can result in the requirement for either the development of noise management plans or legal action.

References:


Measuring Sound Brüel and Kjær Sound & Vibration Measurements A/S
September 1984

Environmental Noise Brüel and Kjær Sound & Vibration Measurements A/S
2000, 2001

New South Wales Industrial Noise Policy NSW Environment Protection
Authority January 2000

<https://www.nti-audio.com/en/support/know-how/frequency-weightings-for-sound-level-measurements>

APPENDIX B Comparison of Sound Pressure Levels

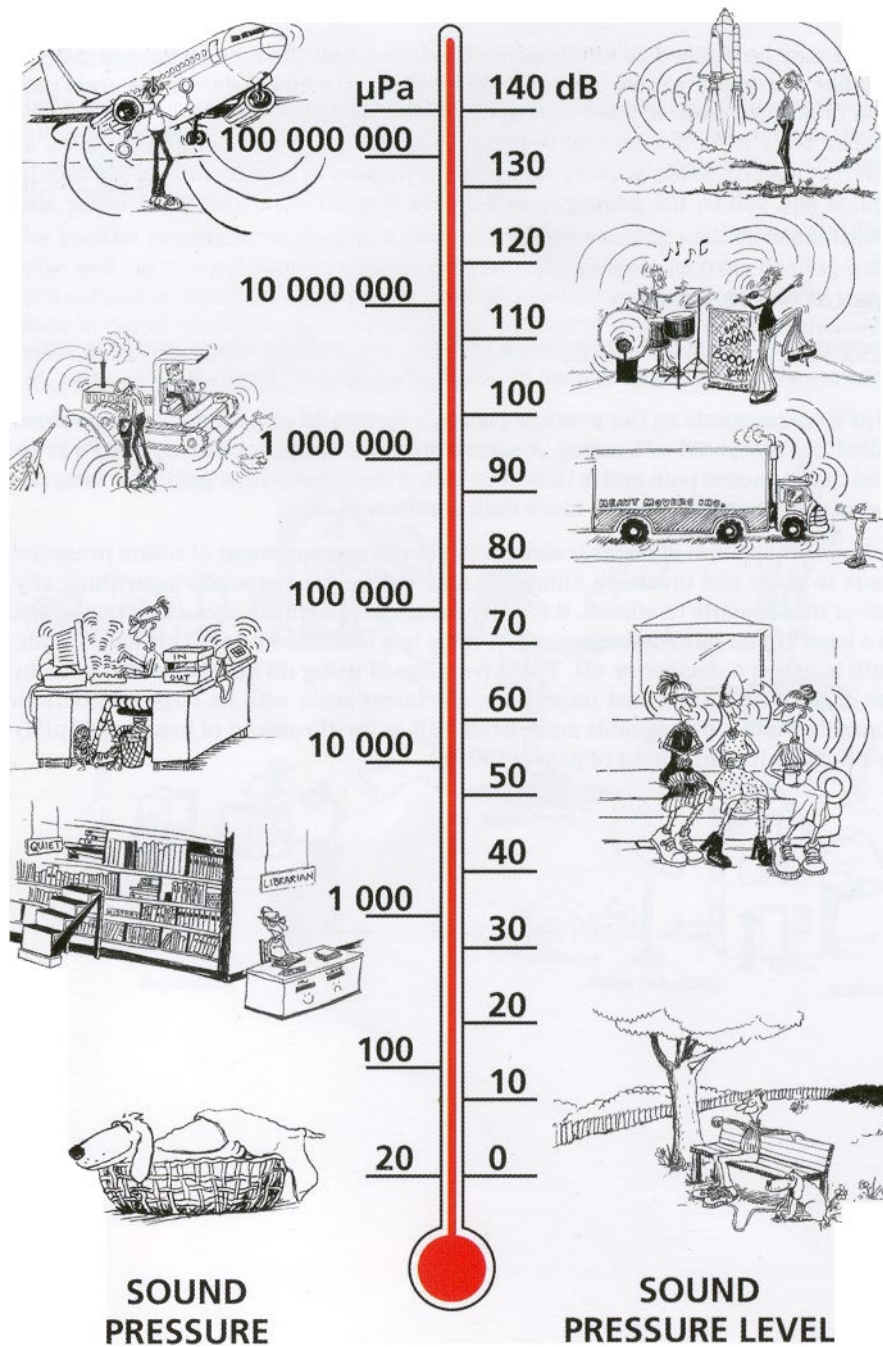

Our hearing covers a wide range of sound pressures – a ratio of over a million to one. The dB scale makes the numbers manageable.

Reproduced from
Environmental Noise Brüel and Kjær Sound & Vibration Measurements A/S
2000, 2001

Appendix C
Quarry and Asphalt Plant Operations 5th & 6th Feb 2025


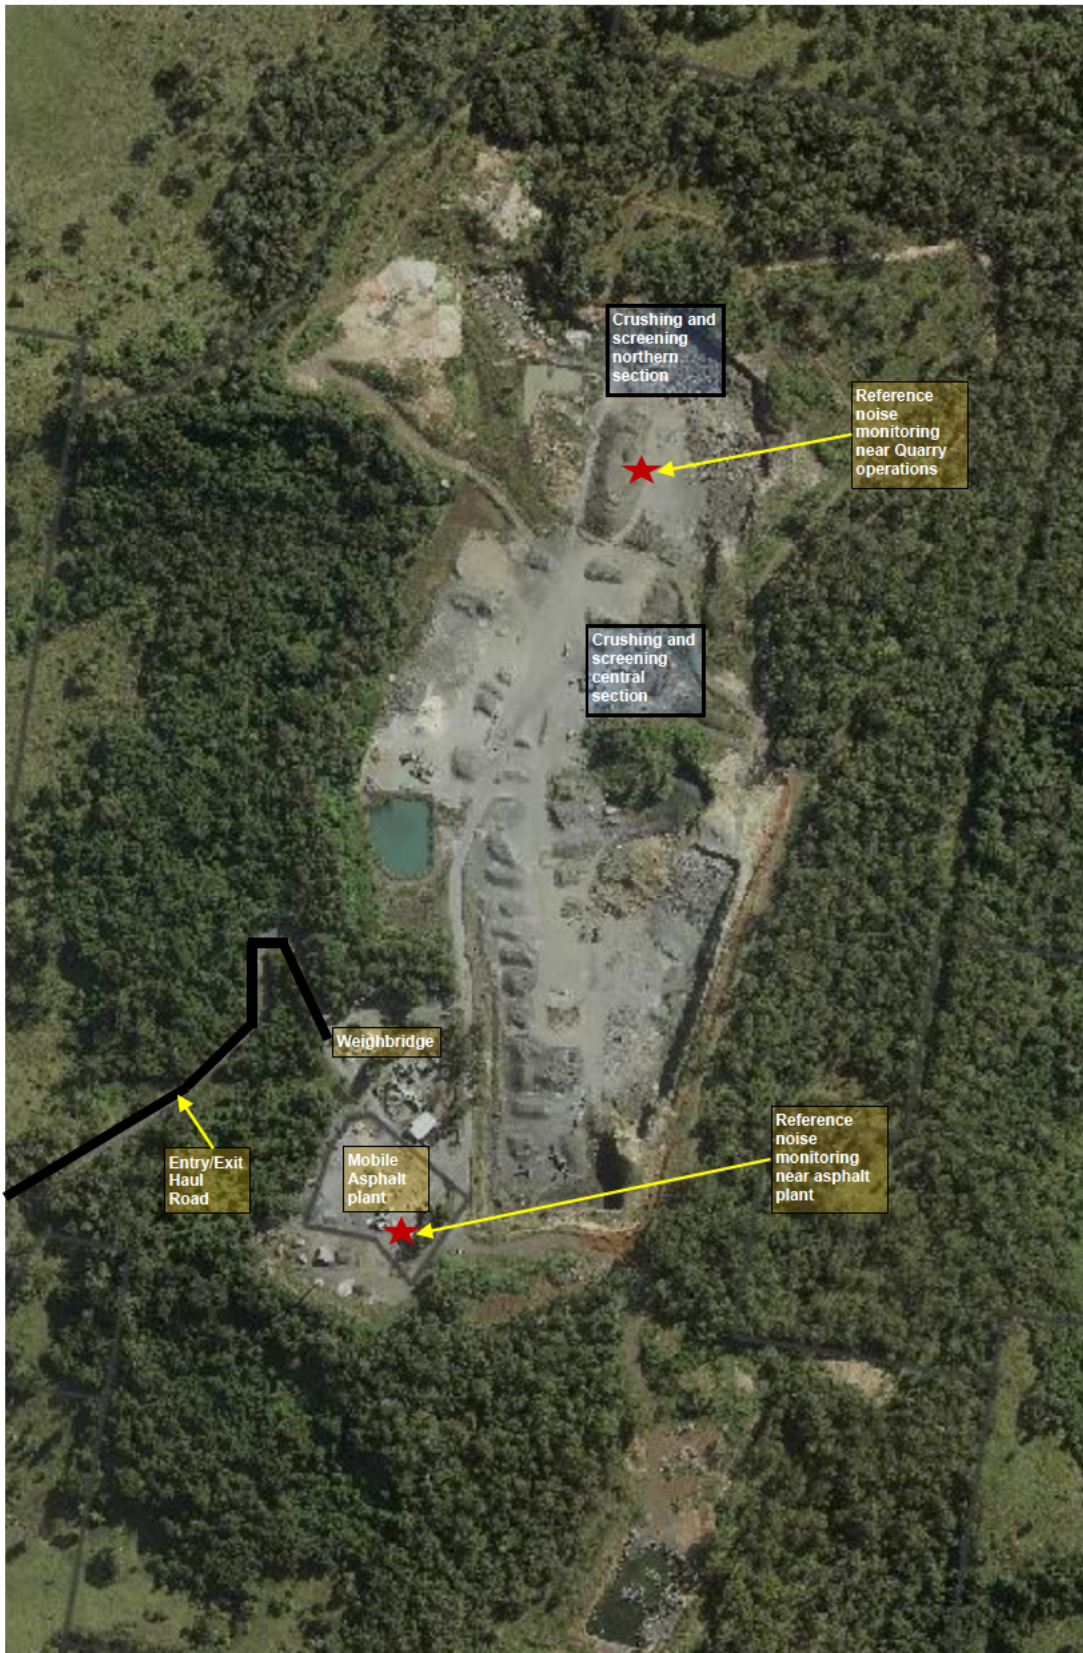


Image Source – Lismore City Council Online Mapping
Note : Aerial photo not of Feb 2025 operations


APPENDIX D

LAF_{max} Logged Noise Level Graphs 5th & 6th Feb 2025


Graph D1 Quarry Floor Monitor Day

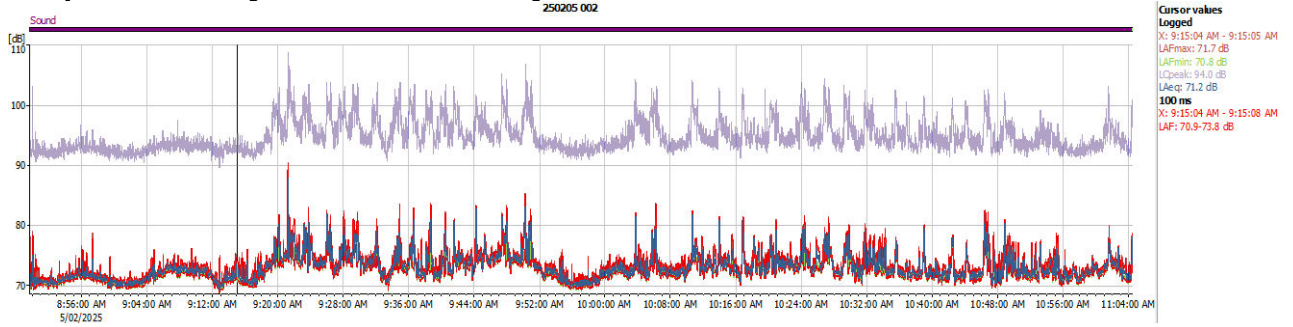


Graph D2 Asphalt Plant Monitor Day

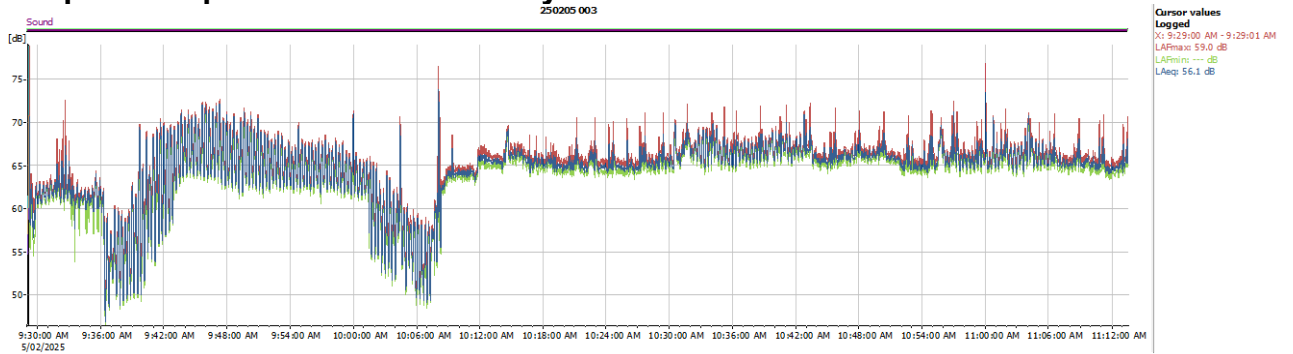


Graph D3 Asphalt Monitor Evening/Night

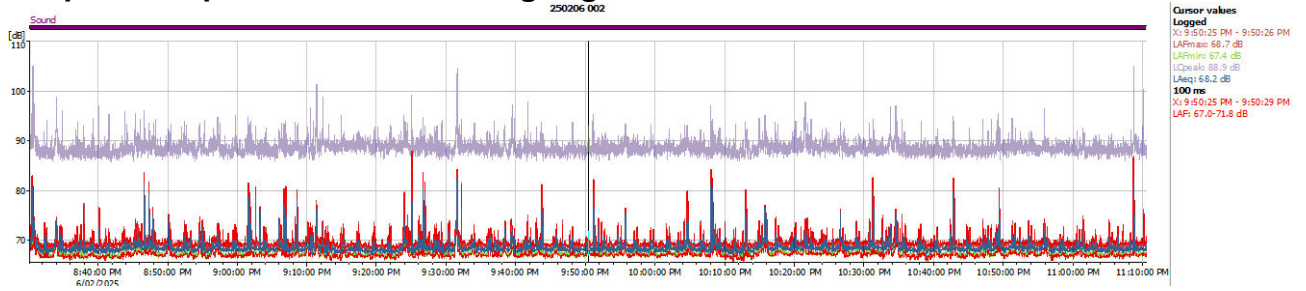


Graph D4 R2 Day

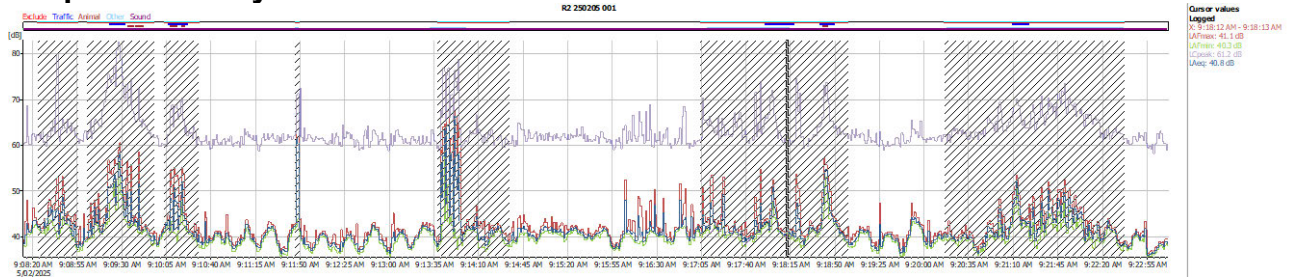


Graph D5 R2 Evening

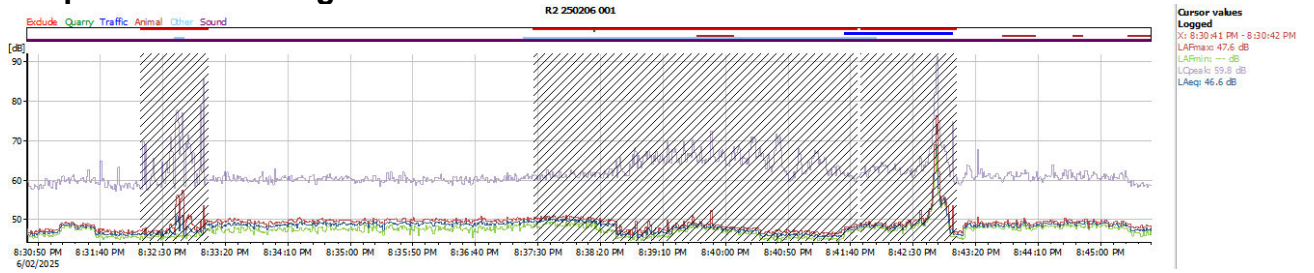


Graph D6 R2 Night

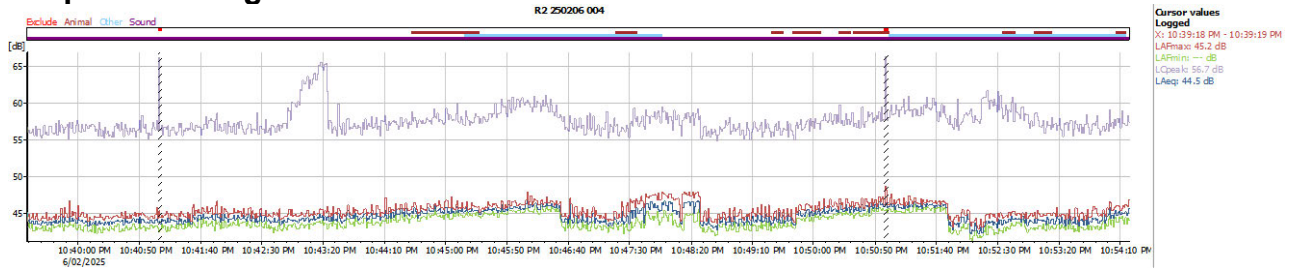


Graph D7 R4 Day

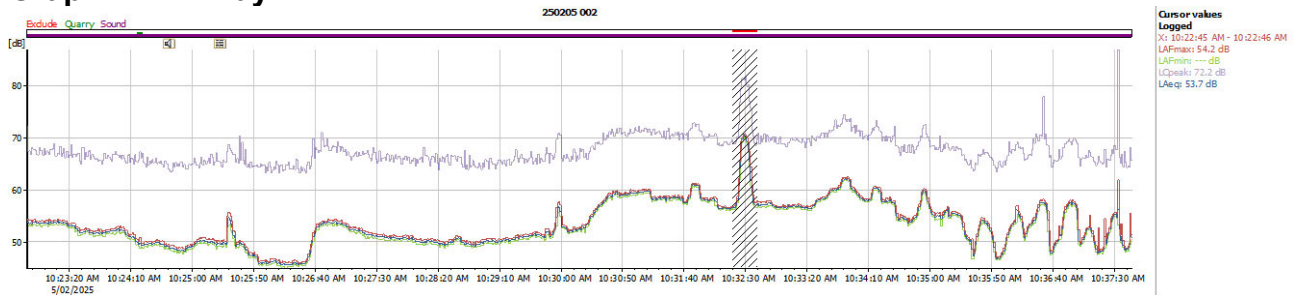


Graph D8 R4 Evening

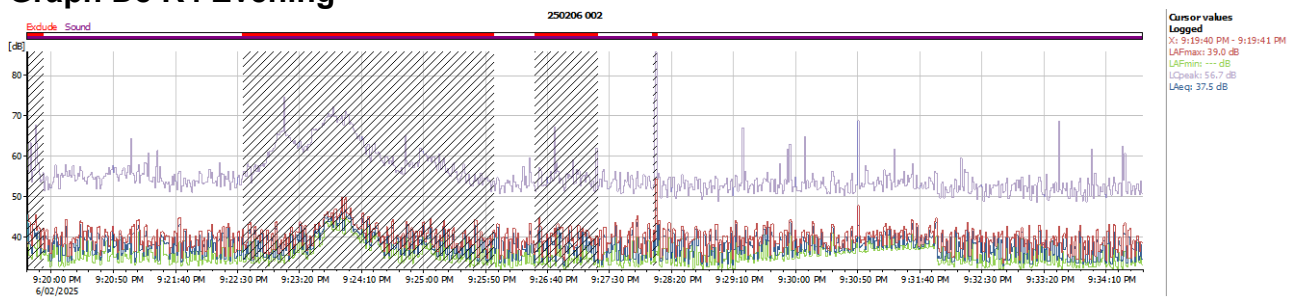


Graph D9 R4 Night

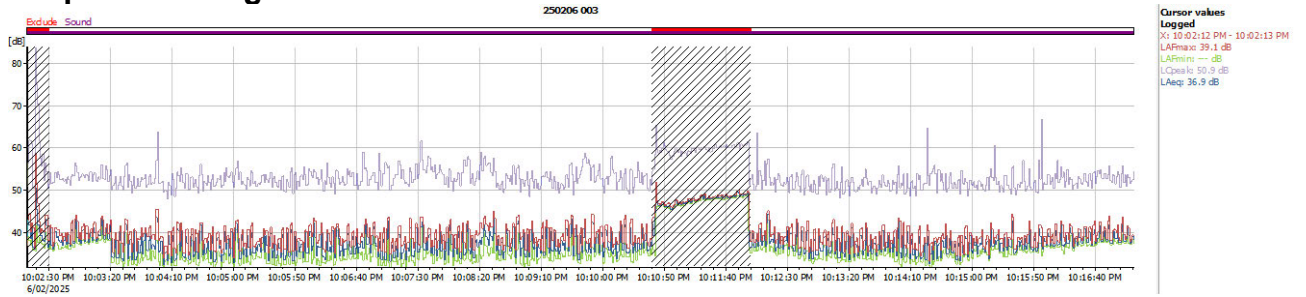

Graph D10 R8 Day

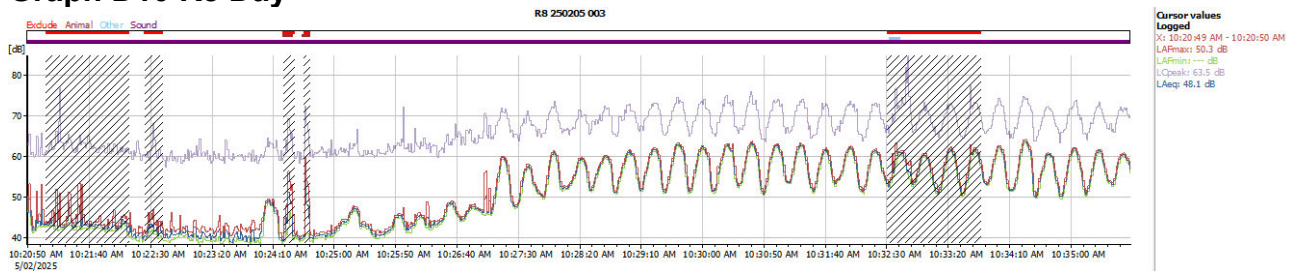

Graph D11 R8 Evening

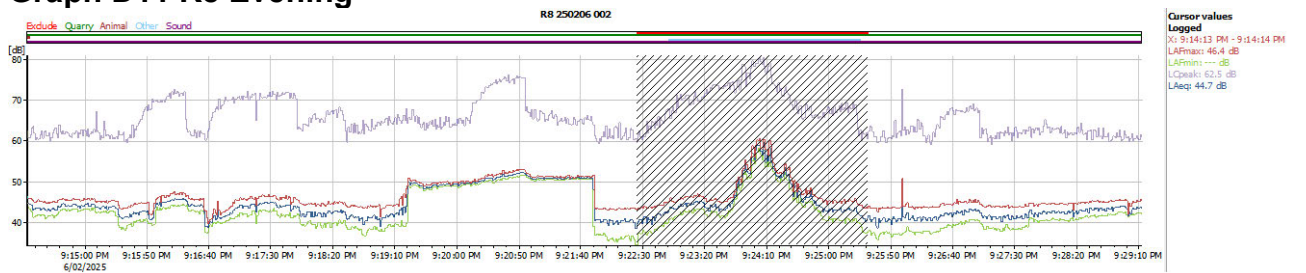

Graph D12 R8 Night

